

Ceiling Speaker T-104U T-105U T-106U

- Power taps @100V 1W, 1.5W, 2W, 3W, 6W, 9W Power taps @70V 0.5W, 1W, 1.5W, 3W, 4.5W
- Built-in 100V/70V transformer
- In-ceiling type loudspeaker
- Metal grille & ABS baffle
- Spring clip fast installation



Frameless Ceiling Speaker T-205T T-206T T-208T

- Rated power (100V) 1.25W, 2.5W, 5W,7.5W, 10W, 15W, 20W, 30W
- Rated power(70V) 0.65W, 1.25W, 1.87W, 2.5W 3.75W, 5W, 7.5W, 10W, 15W
- Built-in 100V/70V transformer
- In-ceiling type loudspeaker
- Plastic shell + metal grille Fast installation by spring clip




Weatherproof Horn Speaker

- Power Taps @100V 15W, 30W Power Taps @70V 7.5W, 15W
- Built-in 100V/70V transformer
- Waterproof projector type loudspeaker
- IP66 waterproof level
- ABS enclosure and metal bracket




Uni-directional Projection speaker T-770

- Power Taps @100V 7.5W, 15W Power Taps @70V 3.75W, 7.5W
- Built-in 100V/70V transformer
- Waterproof projector type loudspeaker 6" full range speaker unit
- IP66 waterproof level
- Aluminum enclosure and metal bracket

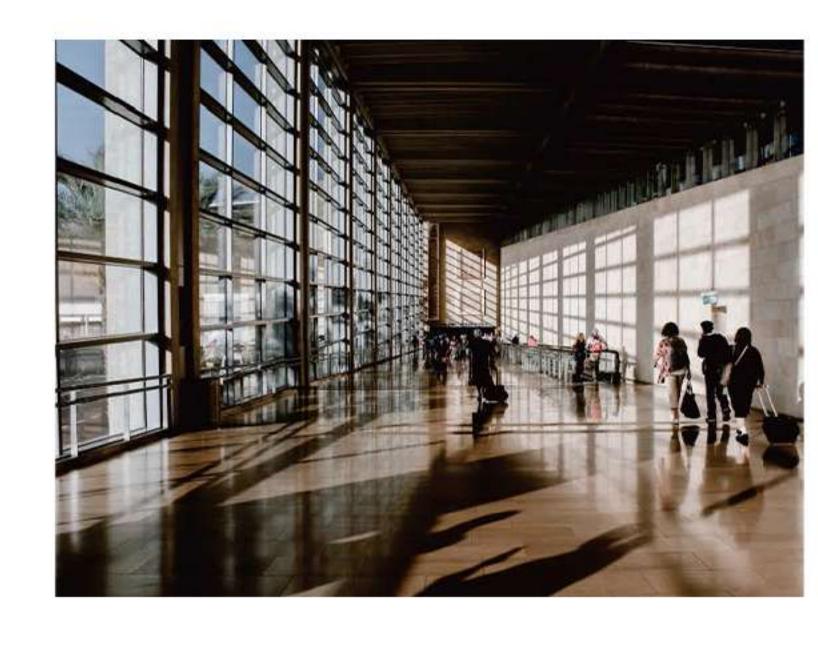

T-205A/T-206A/T-208A

T-4535C

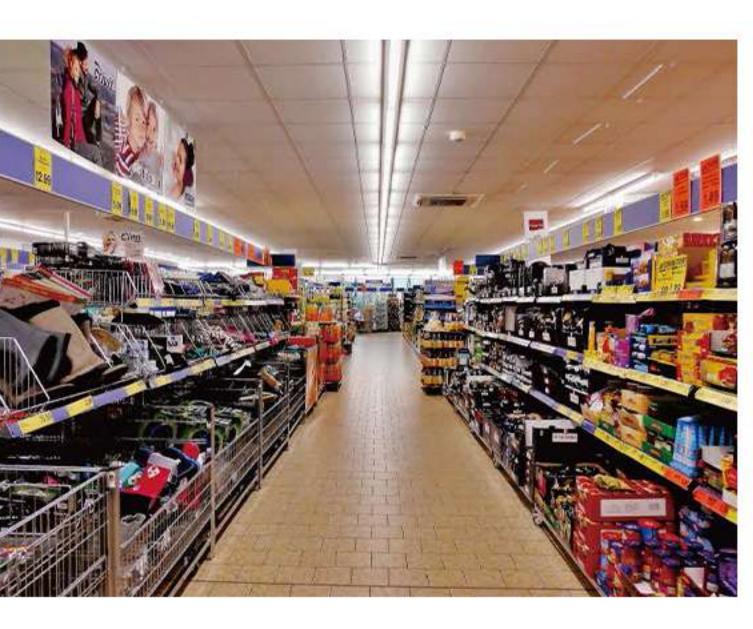

T-200DW

T-206CH



T-710K

T-601




TS-108HT

Wall-mount Speaker T-774H T-775H T-776H T-778H 20W, 30W, 40W, 60W

Power taps @100V 2.5W, 3.75W, 5W, 7.5W, 10W, 15W,

- Power taps @70V 1.25W, 1.9W, 2.5W, 3.75W, 5W, 7.5W,
- 10W, 15W, 20W, 30W, 40W, 60W
- Built-in 100V/70V transformer
- Wall-mount type loudspeaker
 Metal grille, ABS enclosure and stainless mounting bracket



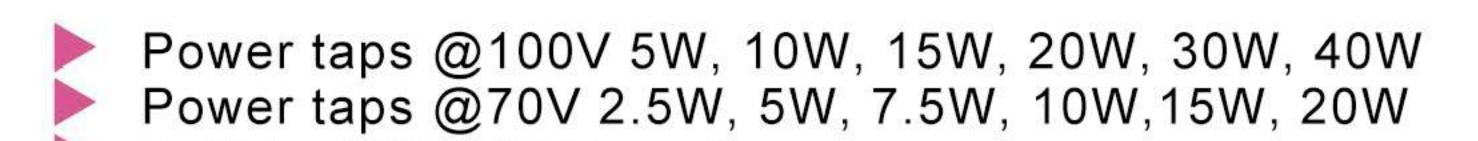

- Built-in 100V/70V transformer
- Weatherproof column type loudspeaker

T-701A T-702A T-703A T-704A

- IP66 waterproof level
- Aluminum enclosure & grille in white
- A pair of metal mounting brackets are supplied











Tabletop Mini Mixer Amplifier with MP3/Tuner/Bluetooth T-B40 T-B60 T-B120 T-B240

- Rated power: 40W, 60W, 120W, 240W
- With 6.3 mic input and RCA line input, for different options
- MIC input, with independent volume cintrol
- Line input with independent volme, and 1 EMC input
- With Auto playback for MP3 and power-off memory function
- With Tuner and Bluetooth function
- Priority: MIC 1 input prior to all other line inputs
- Indicator light for power, signal, overload, protectionand and for 100V output



Tabletop Digital Mixer Amplifier with MP3/Tuner/Bluetooth T-120DM T-240DM T-350DM T-500DM

- Rated power: 120W, 240W, 350W, 500W
- Desktop design, exquisite SMT process design
- Support MP3/Tuner/Bluetooth remote control function, and the control distance can be up to 8 meters
- With USB interface and SD card interfcae, integrated MP3 player module, with automatic priority playing audio function, digital screen can display the current palying track of USB
- Integrated Bluetooth module to support music playback via Bluetooth of the mobile phone
- Each input has indepemdent volume adjustment, and the master volume has treble, bass adjustment and volume control function
- MIC1-4 balanced input, built-48V phantom power supply
- Output: 100V, 4-16Ω



T-60DTB T-120DTB T-240DTB T-350DTB T-500DTB

- Rated power: 60W, 120W, 240W, 350W, 500W
- Standard cabinet design (1U), exquisite SMT process design
- Support MP3/Tuner/Bluetooth remote control function, and the control distance can be up to 8 meters
- With MP3 function module, adopt LCD display, support playback of various file formats in USB disk such as MP3, WMA, APE, FLAC, WAV, and AAC; with TF card, and can display song names
- Integrated Bluetooth module to support music playback via Bluetooth of the mobile phone
- Equipped with level indication, overload and protection indicator
- Output:100V, 4-16Ω



T-B60DTB T-B120DTB T-B240DTB T-B350DTB T-B500DTB

- Rated power: 60W, 120W, 240W, 350W, 500W
- Standard rack mounted design (1U), SMT technology
- Support MP3/TUNER/Bluetooth remote control function, and the remote control distance is up to 8 m
- With MP3 function module, adopt LCD display, support playback of various file formats in USB disk such as MP3, WMA, APE, FLAC, WAV, and AAC; with TF card, and can display song names
- Integrated Bluetooth module to support to play music via Bluetooth mobile phone
- Equipped with level indication, overload and protection indicator

www.itctech.com.cn



5 Zones Digital Mixer Amplifier with MP3/Tuner/Bluetooth TI-120DTB TI-240DTB TI-350DTB TI-500DTB

2 Channel Mixer Amplifier with Effector and MP3/Bluetooth

- Rated power: 120W,240W,350W,550W
- Standard rack mounted design(1U) with delicate SMT technology
- With MP3/TUNER/Bluetooth, songs being played can be shown on the digital screen
- With MP3/TUNER/Bluetooth remote control function
- 1 EMC input, 2 AUX inputs, 4 MIC inputs
- Channel priority function EMC>MIC1>MIC2, MIC3, AUX1, AUX2
- Each input has independent volume adjustment, and the master volume with treble, bass adjustment and volume control
- With electrical level and overload protection indicator
- The device has good self-prorection such as short cercuit, overload and overheat
- Perfect combined design for high efficiency& energy saving switch power and class-D amplifier, with high stability

Three channels microphone input with independent gain adjustment

With professional digital echo delay circuit to make the voice more

With MP3 recording function, songs and speech can be recorded

60W×2/120W×2 @100V output, can be connected with

MP3 player with SD/USB interface, with Bluetooth and digital display

With forced cooling fan to enhance the rejection of heat, can be long

Using 1U chassis design, with switching power supply and type H power

amplifier chip combination, efficient, light weight, beautiful appearance.

Voltage Power Supply: 220V-240V

TS-2060WV TS-2120WV

Two channels audio input, with switching function.

- 24VDC power supply optional
- Output: 100V,4-16Ω

and played by MP3

time working.

two groups of speakers.



Rated power: 120W,240W,350W,550W 4 channel Mic inputs, 2 channer line inputs, separted treble and bass control 6 zones output, separate zone volume control Built-in chime, the chime is optional, 4 tones and 2 tones with alarm

TI-1206S TI-2406S TI-3506S TI-5006S

With MP3 function module, adopt LCD display, support plauback of various file formats in U disk such as MP3, WMA, APE, FLAC, WAV, and AAC; with TF card, support moblie phone Bluetoth function, and can display song names

2/4 Channel Matrix Digital Mixer Amplifier with MP3/

▶ 120W/240W constant impedance/voltage high performance digital power

6 Zones Digital Mixer Amplifier with MP3/Tuner/Bluetooth

- Built-in 24VDC
- MIC1-4 built-in 48V phantom power and independent volume control
- T-216 remote microphone can remote control zone output, maximum cascade to 6 mics
- The audio input with separate control, tone control and master volume control

T-2120UC/T-2240UC/T-4120UC/T-4240UC

- Five priority levels: EMC>TEL/Remote
- MIC>built-in chime>MIC1>MIC2-4, LINE1-2



amplifier (4-16Ω/100V) with 2/4 channel outputs Built-in MP3 recording function

6 inputs independent volume control 1-4 input with adjustable gain control

Tuner/Bluetooth

- 2/4-channel outputs support independent tone control
- Support 2/4 remote microphone T-214B
- Built-in MP3 (U disk/SD card) player function
- Built-in FM radio function
- Built-in Bluetooth function and high-gain Bluetooth antenna to connect to mobile phones / computers
- Adopt 2.4-inch high-grade TFT screen
- 2/4 channel outputs support remote control panel T-651
- Distortion, protection, signal, output status indicator
- 1-4 inputs channels support phantom power




1/2/4 Channel Class-D Power Amplifier

T-1120DS T-1240DS T-1350DS T-1500DS T-2120DS T-2240DS T-2350DS T-2500DS T-4120DS T-4240DS T-4350DS T-4500DS

- Rated power: 1*120W, 1*240W, 1*350W, 1*500W 2*120W,2*240W,2*350W,2*500W 4*120W,4*240W,4*350W,4*500W
- Built-in high efficiency switching power supply
- Reasonable heat dissipation to maintain a working temperature lower than 55 degree
- With fault output function to remotely monitor the working state of
- Output: 100V, 4-16**Ω**

info@itc-pa.com.cn



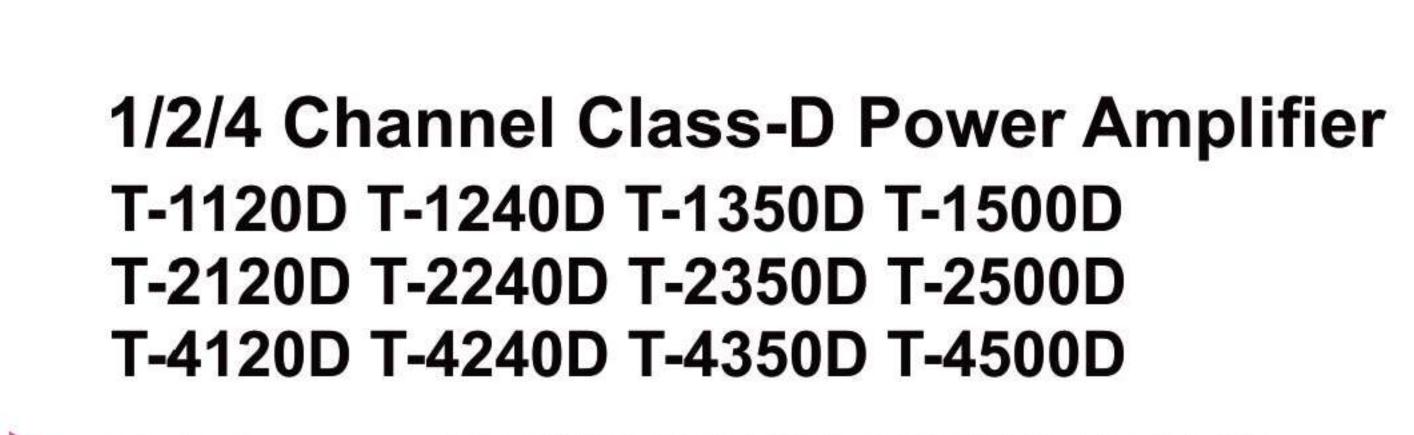

- Rated power: 1*120W, 1*240W, 1*350W, 1*500W 2*120W,2*240W,2*350W,2*500W 4*120W,4*240W,4*350W,4*500W
- 1/2/4 channel class-D digital power amplifier
- The rear panel is equipped with a "ground" line suspension switch, which effectively eliminates the loop noise caused by the connection of the "ground" lines of multiple equipment signals
- 85% high efficiency amplifier, low power loss, low heat
- With European terminal balanced input and output
- Remote control of power-on function: remotely turn on the power and disconnect the power when both functions are turned off at the
- Fault output function, remote monitoring power amplifier working
- With 24V standby power inverter function, power amplifier with voltage limit, short circuit, overload, overheat protection





